



DUXBOND[®]

AWNING AND ROOFING

ALUMINIUM COMPOSITE PANEL

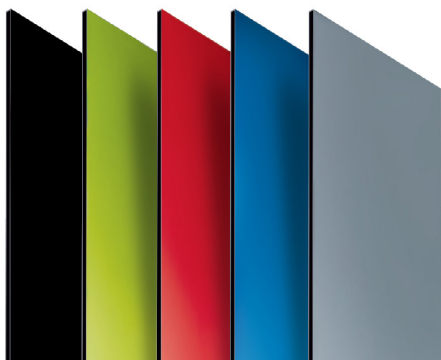

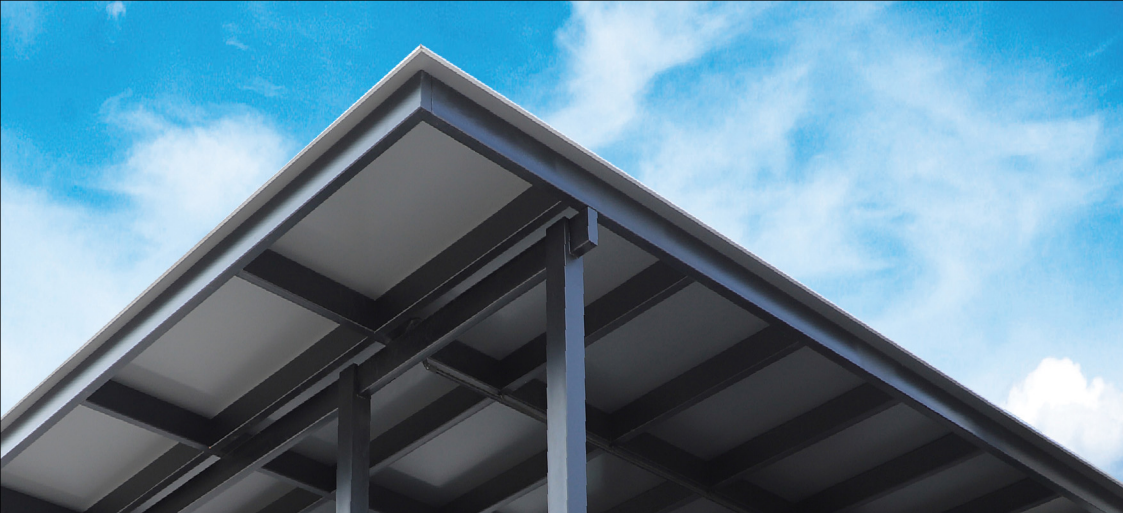


DUXBOND®
AWNING AND ROOFING

ALUMINIUM COMPOSITE PANEL

DUXBOND ACP COMPOSITION

- 1 Protective Peel-Off Film
- 2 Pretreated **Aluminium Skin** with coating
- 3 Adhesive Film
- 4 Polyethylene (PE) Core



DUXBOND ACP DIMENSION

Standard Width	1220mm (4ft)
Standard Length	2440mm (8ft) , 3660mm (12ft), 4270mm (14ft) , 4880mm (16ft), 5490mm (18ft) , 6100mm (20ft)
Available Thickness	4mm

METALLIC COLOUR




Flash Silver / White



Black Silver / Flash Silver



Bronze Silver / Flash Silver

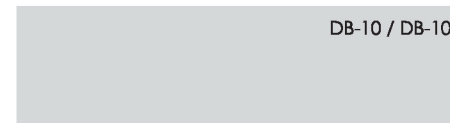

Flash Silver / Flash Silver



Champagne Silver / Flash Silver



Jade Silver / Flash Silver


SOLID COLOUR



Tropic Blue / White



Dark Chocolate / White

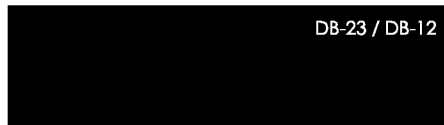

Bosic Black / White



Orange / White



Finland Green / White



Amazon Red / White



Charcoal Grey / White



Yellow / White



Dark Blue / White



Jade Green / White


Disclaimer:

The colours in the flyer are not the actual coated finishing, but a printed shade for illustration and reference. Despite every effort to provide accurate product's colour, the colour of the actual product may slightly vary from the colour shown in the flyer.

Recommended Installation Method

Make sure the support structure is clean and dry. Do not directly screw the sheet. Only use aluminium cap for joining. Must leave a gap of at least 15mm-20mm in between sheets for thermal expansion and contraction.

A minimum slope of 5° roof pitch is recommended to allow adequate rainwater run-off.

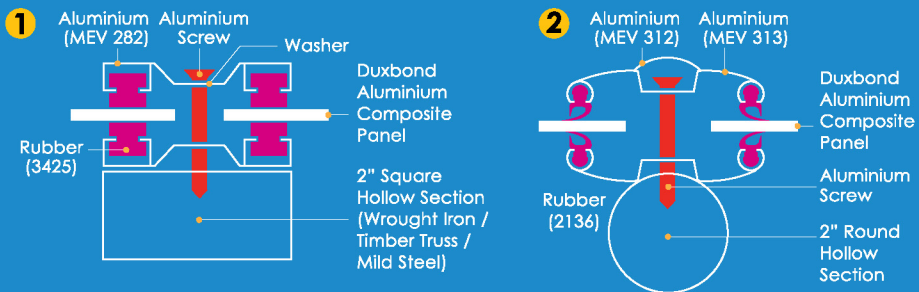

Manufactured By:

